

Content

Viscose 56%
Flax 18%
Acrylic 18%
Jute 8%

Flame Resistance

California Technical
Bulletin 117
EN1021 1/2
British Standard 5852:
1990 Source 5 (crib 5)

Lightfastness


ISO 4/5

Abrasion

30,000 rubs
Martindale method

Maintenance


Clean with solvent-based
cleaning agent

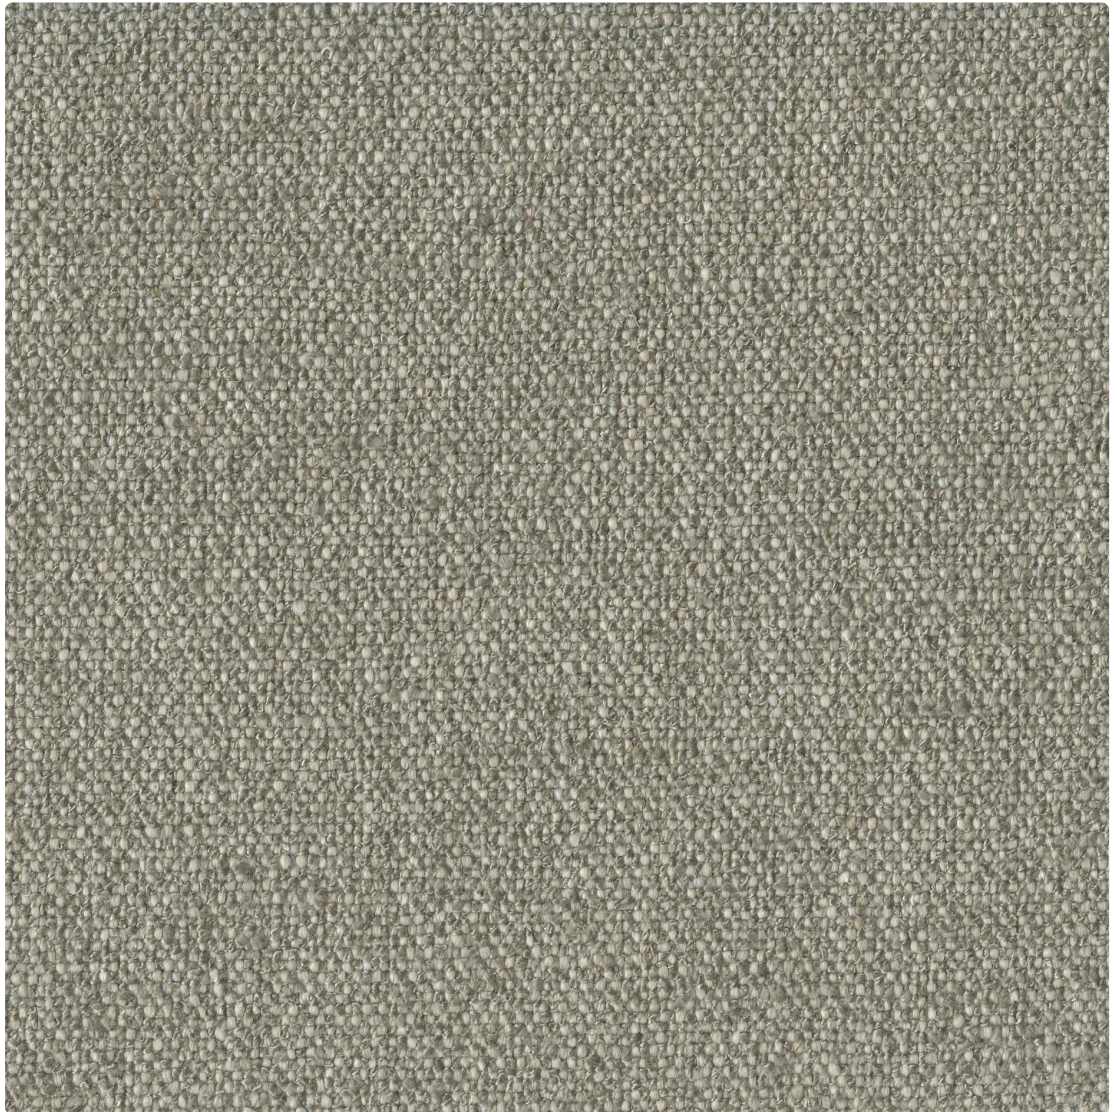


06EX Light Beige




26EX Sand



21EX Blue

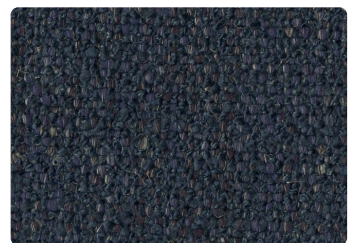

17EX Navy



10EX Aubergine