

Content

Viscose 40%
Cotton 25%
Acrylic 23%
Polyester 7%
Other fibres 5%

Flame Resistance

California Technical
Bulletin 117
EN1021 1/2
British Standard 5852:
1990 Source 5 (crib 5)

Lightfastness


ISO 4/5

Abrasion

35,000 rubs
DIN EN ISO 12947-2

Maintenance

Clean with solvent-based
cleaning agent

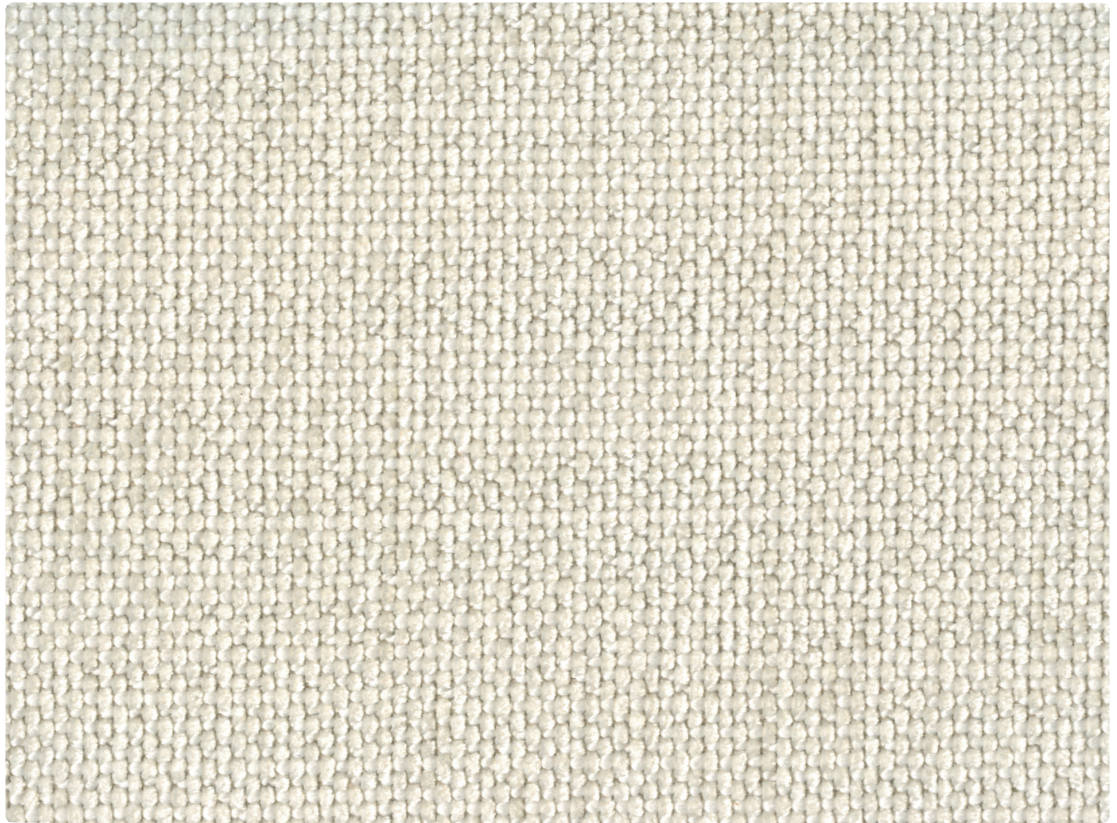

01MH Ivory




02MH Sand



03MH Taupe




04MH Brown




06MH Pearl



07MH Charcoal

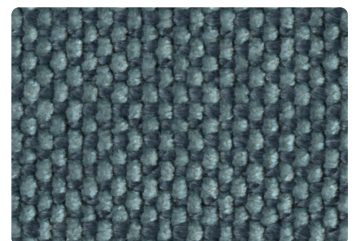

05MH Teal



08MH Deep sea