

Content

Acrylic 47%
Cotton 26%
Flax 9%
Polyester 9%
Viscose 9%

Flame Resistance

California Technical
Bulletin 117
EN1021 1/2
British Standard 5852:
1990 Source 5 (crib 5)

Lightfastness


ISO 4/5

Abrasion


30,000 rubs
Martindale method

Maintenance

Clean with solvent-based
cleaning agent

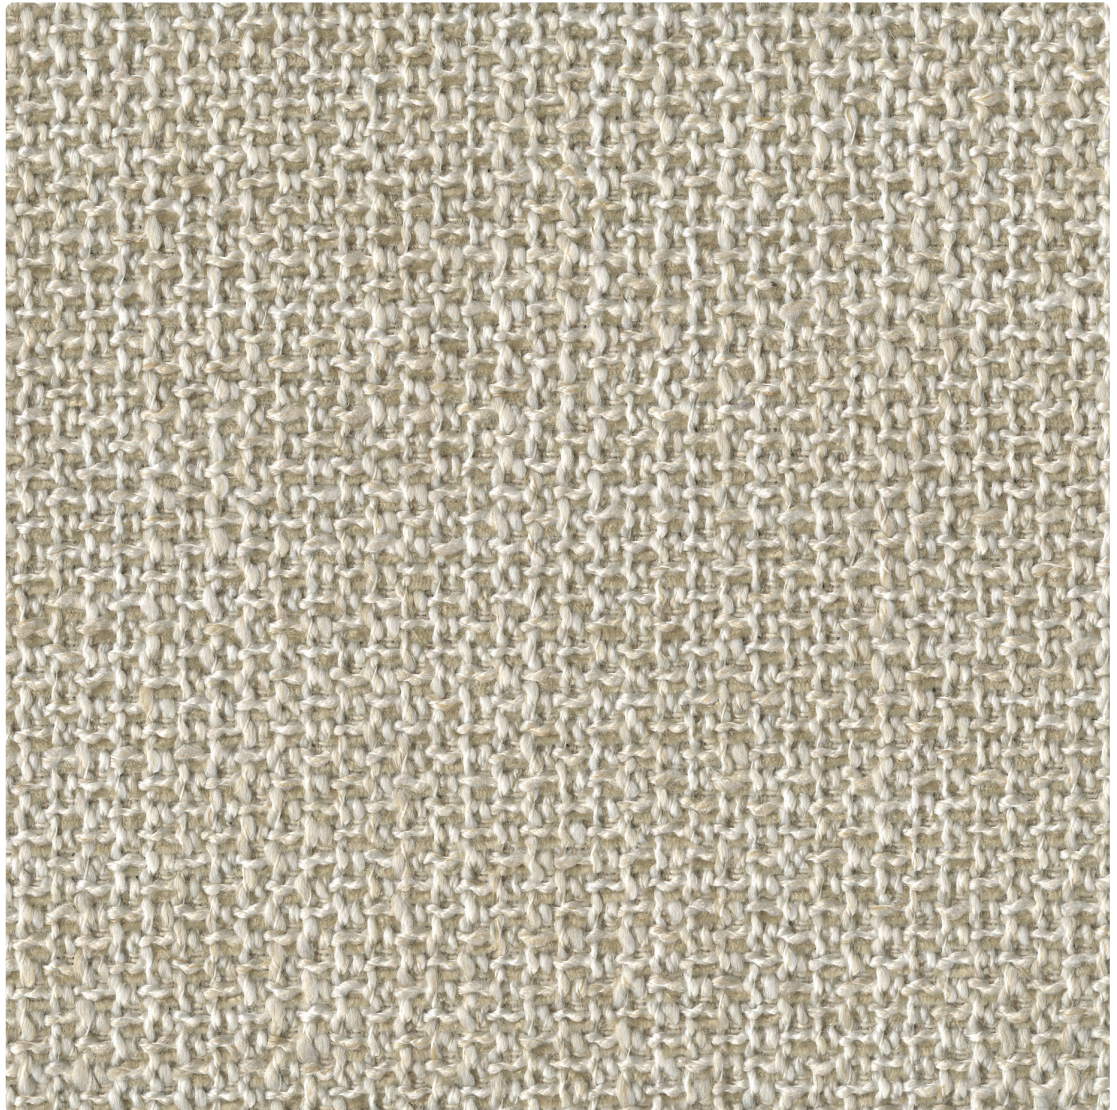

65CRO Ivory



35CRO Brown



52CRO Bluish Green



14CRO Blue