

Content

Cotton 52%
Viscose 22%
Acrylic 14%
Flax 6%
Nylon 3%
Polyester 3%

Flame Resistance

California Technical
Bulletin 117
EN1021 1/2
British Standard 5852:
1990 Source 5 (crib 5)

Lightfastness

ISO 4/5

Abrasion

50,000 rubs
Martindale method

Maintenance

Clean with solvent-based
cleaning agent




04HL Ivory



05HL Silver




15HL Grey

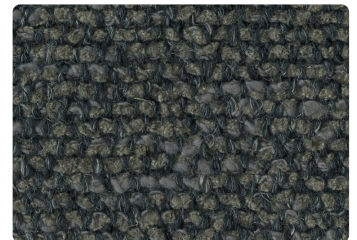


07HL Dark Grey



13HL Brown/White



12HL Red Brick

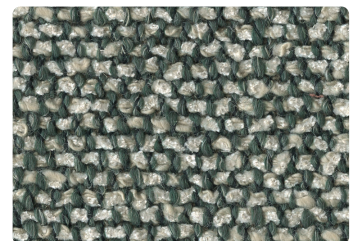

03HL Green/White



01HL Olive